

68.1 Removal and Installation of Covering on Box-Type Pillar

107

Removal

- 1 Remove coupe top.
- 2 Open top well lid.
- 3 Remove screws (1 and 2).
- 4 Remove covering.

Installation

- 5 For installation proceed vice versa.

Note: Match covering to top well lid.

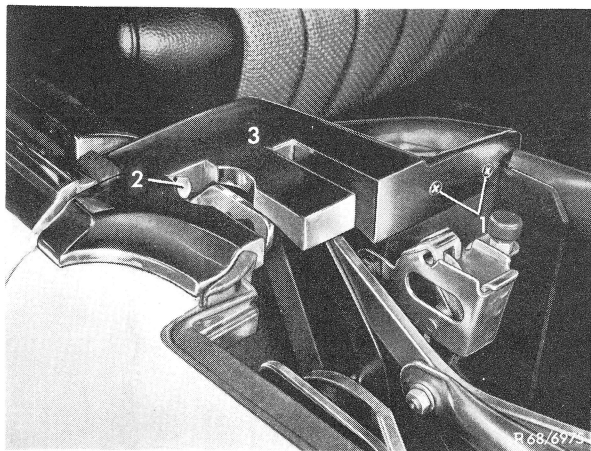


Figure 1

- 1 Screws
- 2 Screws

- 3 Covering