

72.1 Removal and Installation of Door Bag

107

Removal

- 1 Remove door lining (72.1–100).
- 2 Remove armrest with grip (72.1–140).
- 3 Remove screw (1) from under door heating duct.
- 4 Fold door pocket downwards and thereby disconnect from hooks (2).

Installation

- 5 For installation proceed vice versa.

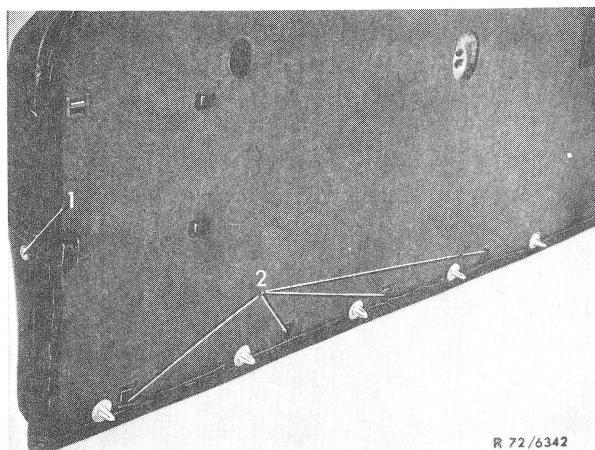


Fig. 1

- 1 Screw
- 2 Hooks