

91.1 Removal and Installation of Passenger Seat

107

Removal

- 1 Slide passenger seat completely forward.
- 2 Loosen safety belt on outer end of seat.
- 3 Remove hex. screws (1) on both sides at rear and Philips head screws (2) on seat guide rail.
- 4 Slide passenger seat completely back.
- 5 Remove screws on both seat guide rails front.
- 6 Remove passenger seat.

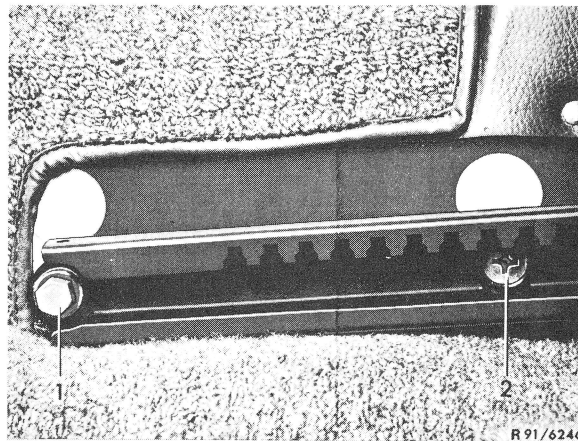


Fig. 1

- 1 Hex. bolt
- 2 Philips head screw

Installation

- 7 For installation proceed vice versa.