


All types

At the second maintenance job,  
then every 15 000 km / 10 000 miles

Filling:	only distilled water
Quantity:	as required

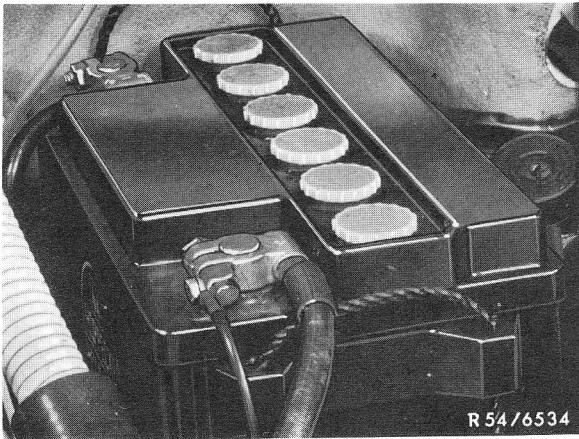

- Top up with distilled water until the prescribed acid level is reached.

The fluid level should be at the acid level mark in the cells or 10–15 mm above the upper edge of the plates.

**Note**

At high ambient temperatures check acid level more frequently.