

## Removal

- 1 Remove coupe top and place on pertinent bench in inverted condition.
- 2 Remove both screws on lock (1).
- 3 Remove lock (1).

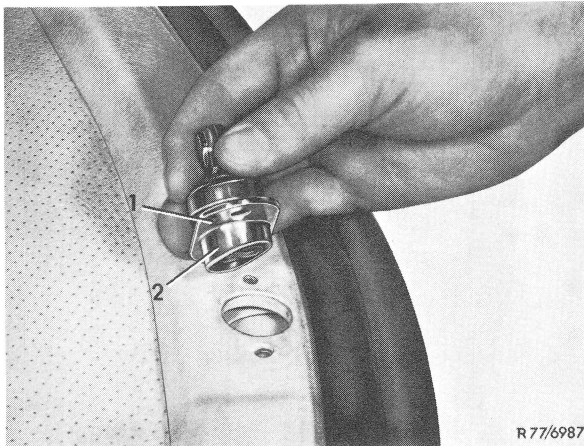


Figure 1

- 1 Lock
- 2 High end

## Installation

- 4 For installation proceed vice versa.

**Caution!** To prevent damaging the top, install lock in such a manner that the high end (2) faces toward the rear.

**Note:** The lock is marked left and right.