

# 47.1 Removal and Installation of Immersion Tube Indicator

---

## Removal

---

- 1 Remove hard top, open top lock and remove top. Remove plastic cover.

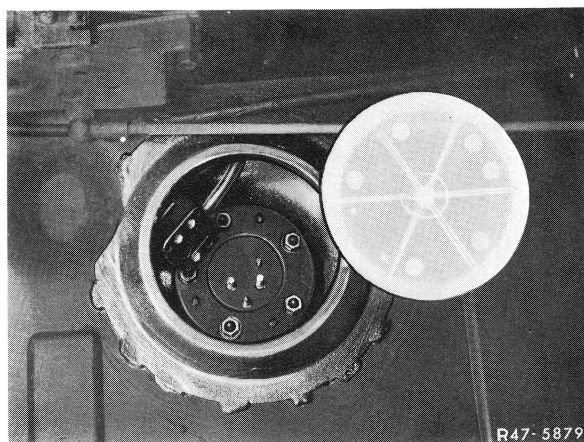


Fig. 1

- 2 Pull cable plug connection from immersion tube indicator. Unscrew fastening nuts of immersion tube indicator and remove indicator.

## Installation

---

- 3 For installation proceed vice versa using a new seal.

**Caution!** Use **rubber seal 107 471 01 80** as seal **only**.

Mount seal with **sealing lips toward fuel tank**.