

At the second maintenance job,
then every 15,000 km/10,000 miles

Engine M 100
Diesel engine OM 615, 616


Special tool

Syringe

112 589 00 72 00

Engine M 100


- Screw out dipstick (1). If the oil level is low, top up with engine oil through the filler neck (2) to the mark on the dipstick. If the oil level is too high, all the oil must be drawn out with a syringe and replaced by fresh engine oil.

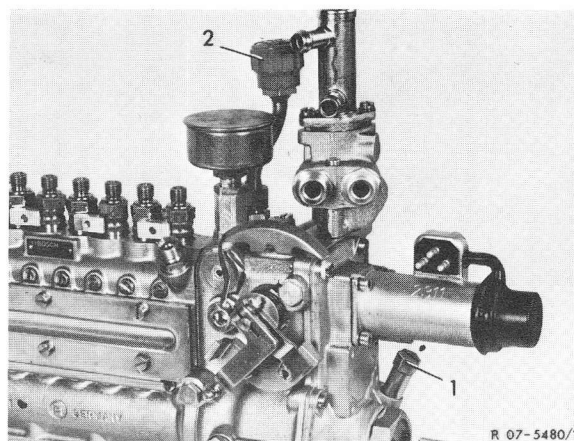

- 1 Dipstick
- 2 Filler neck

Engine OM 615

- Unscrew check plug (1). If oil level is too high, drain oil up to check bore.
- If no oil flows from the check bore, unscrew filter (2) and top up with engine oil to the check bore.

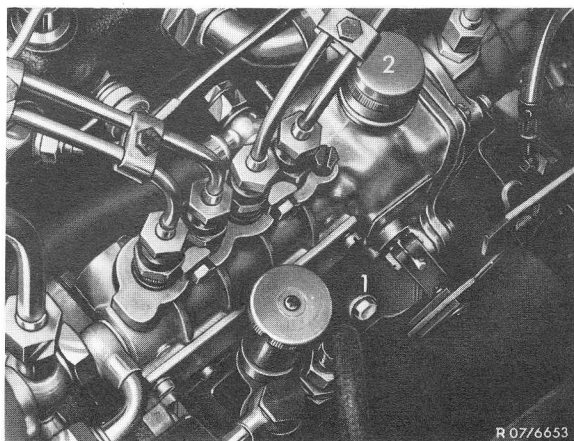

- 1 Check screw
- 2 Filter