

107

Loosen both Philips head screws (1) and pull off front member (2) of headlight.

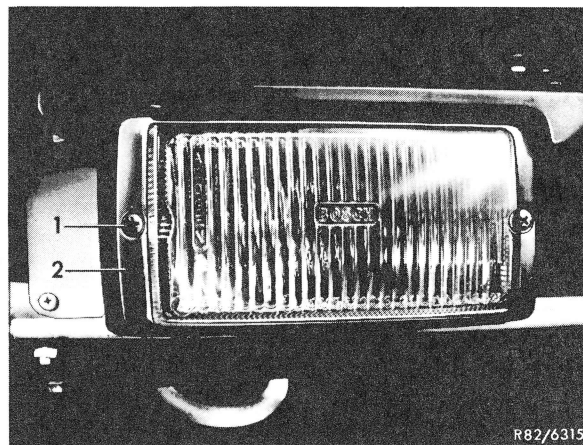


Fig. 1

- 1 Philips head screw
- 2 Fog light front member

Loosen spring clip (3) and swivel toward the right. Remove halogen bulb (4) and loosen plug connection (5).

The new bulb is installed in a sequence vice versa to removal. Watch out for correct position of rubber sealing frame (6).

Note: Do not touch glass body of bulb with bare fingers.

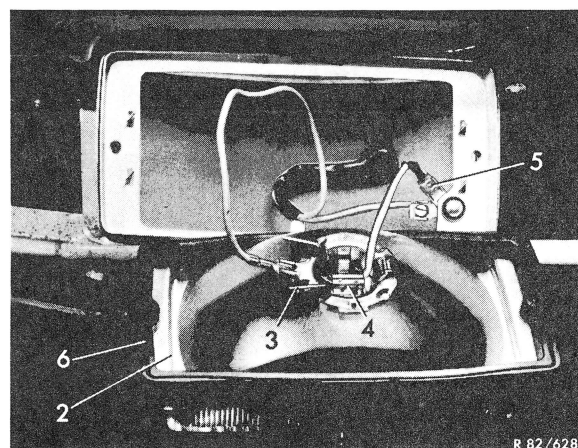


Fig. 2

- 3 Spring clip for bulb socket
- 4 Halogen bulb Type H3
- 5 Plug connection
- 6 Rubber sealing frame