

Removal

- 1 Remove door lining (72.1–100) and pull off plastic sheeting in front range.
- 2 Crank up side window.
- 3 Pull off lock on bolt (1) and remove bolt. Watch out for the two spacing washers (4).
- 4 Slightly raise door sealing frame in range of hex. socket screw (2).

- 5 Unscrew hexagon socket screw (2).
- 6 Unscrew Philips head screw (3).
- 7 Remove door catch.

Installation

- 8 For installation proceed vice versa.
- 9 When assembling bolt, watch out for plastic spacing washers, which are available 1 and 2 mm thick.

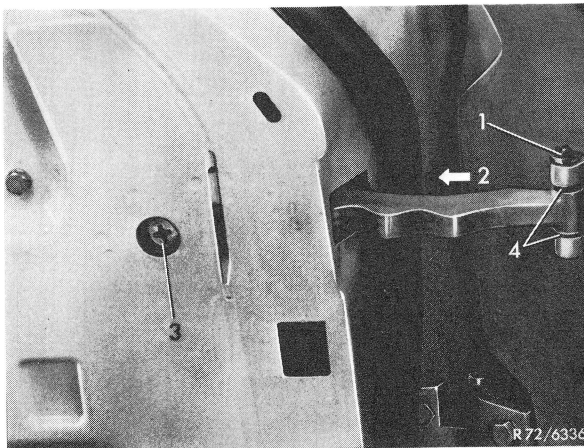


Fig. 1

- | | |
|---------------------|----------------------|
| 1 Bolt | 3 Philips head screw |
| 2 Hex. socket screw | 4 Spacing washers |