

Note

The time clock is held in cutout by means of a profilated rubber section.

Removal

1 Carefully push clock out of instrument panel by means of a screw driver. Loosen electrical connection. Remove clock.

Note: If the clock is held too tightly and there is a risk of damaging the instrument panel, remove cover for radio set and push clock out from the rear.

Installation

2 For installation proceed vice versa.

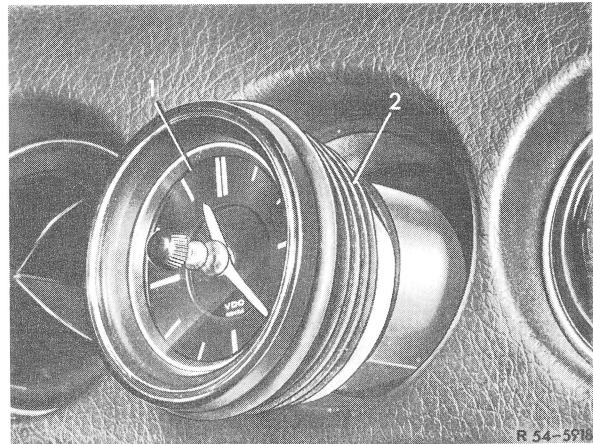


Fig. 1

1 Time clock

2 Profilated rubber section